

# TE ENERGY

AIR-INSULATED COMPACT SWITCHGEAR UP TO 24 kV  
FOR PRIMARY AND SECONDARY DISTRIBUTION SYSTEMS

**SG25\_SCELL** | 24 kV, 1250 A, 25 kA



The technology is protected under Patent No.GB2582172/EP3709332


**ON TIME WITH  
CONFIDENCE**

# BUILDING BLOCKS

## Network digitalization

Distribution network operators all over the world produce high demands for the equipment in their ownership in terms of digital network compatibility and variety of typical applications. SmartGrid, SCADA, DMS, remote operations, self-healing network algorithms, fault location, protocol, RTU features are just a few drops in a wide ocean of functionality required by modern digital network.

SCELL panel is a universal building block to build up customer's sophisticated network of any configuration and functionality thanks to its instant digital network readiness, powerful electrical parameters, functional versatility and compact size.

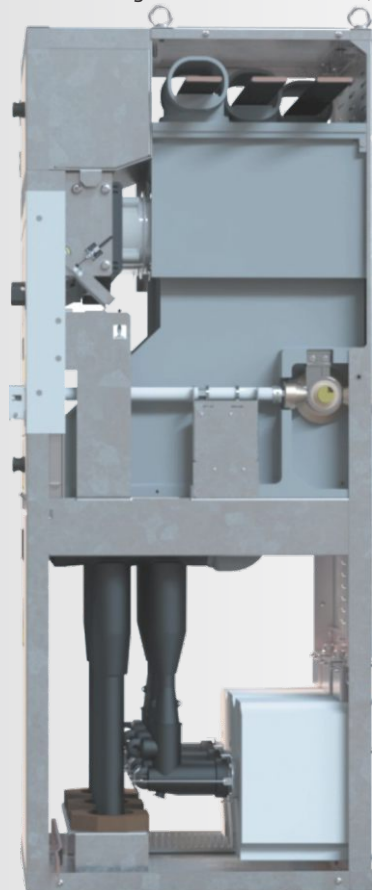

**SCELL intelligence** is provided by a powerful Intelligent Electronic Device (IED) with digital current and voltage inputs, rich protection, automation and communication features.




**SCELL heart** represents a standard combination of: 3 position (service, earthed, isolated) change over switch (COS) with detachable earthing blades  
Fast vacuum circuit breaker (VCB) with an extremely long electrical and mechanical life.

Both of switching devices are capable of performing as an "isolation device" as per IEC 61140.



**SCELL sensing** includes digital current and voltage sensors, temperature and PD sensors.

SCELL is a tool to either renovate existing networks or construct a new one. It can be easily integrated into any existing or newly expand SCADA system. As a grid automation ready solution, SCELL can be offered with TELSCADA – a perfect tool, allowing implementation of multi-scale grid automation projects, where other network assets (such as MILE family panels or reclosers) can be integrated.




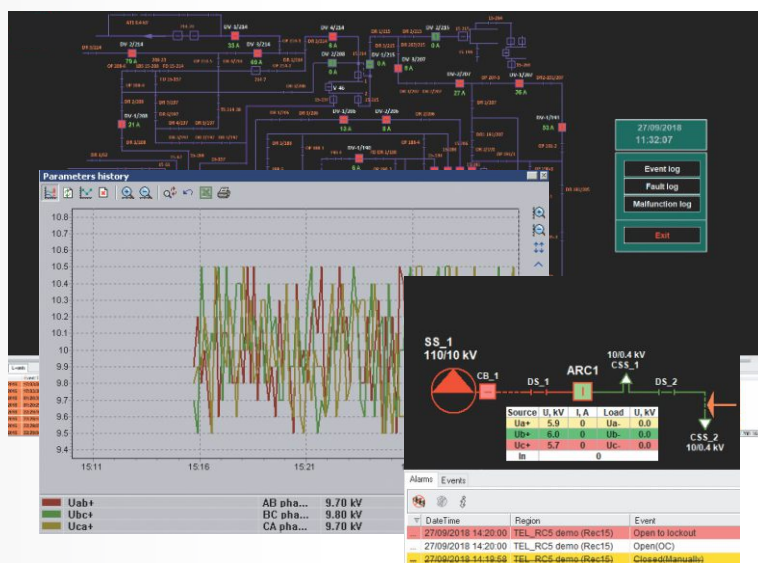


Adhering to the highest international quality standards, our products are manufactured within the European Union (Tallinn, Estonia) in compliance with ISO 9001 and ISO 14001 certifications.





# STATE-OF-THE-ART MANUFACTURING



- Application of the latest technologies in sheet metal and copper busbar processing such as laser cutting, CNC machining, powder coating, electroplating, etc. allows SCELL to meet the highest standards in quality product production.




- In-house testing facilities are available to conduct primary and secondary current injection tests as well as high voltage and partial discharge tests which constitute the core of the comprehensive routine testing program on SCELL.




# VERSATILE APPLICATIONS

SCELL is designed for indoor installations and applications with voltage level up to 24 kV, continuous rated current up to 1250 A, short-circuit current of up to 25 kA and intended for use in primary and secondary distribution systems.

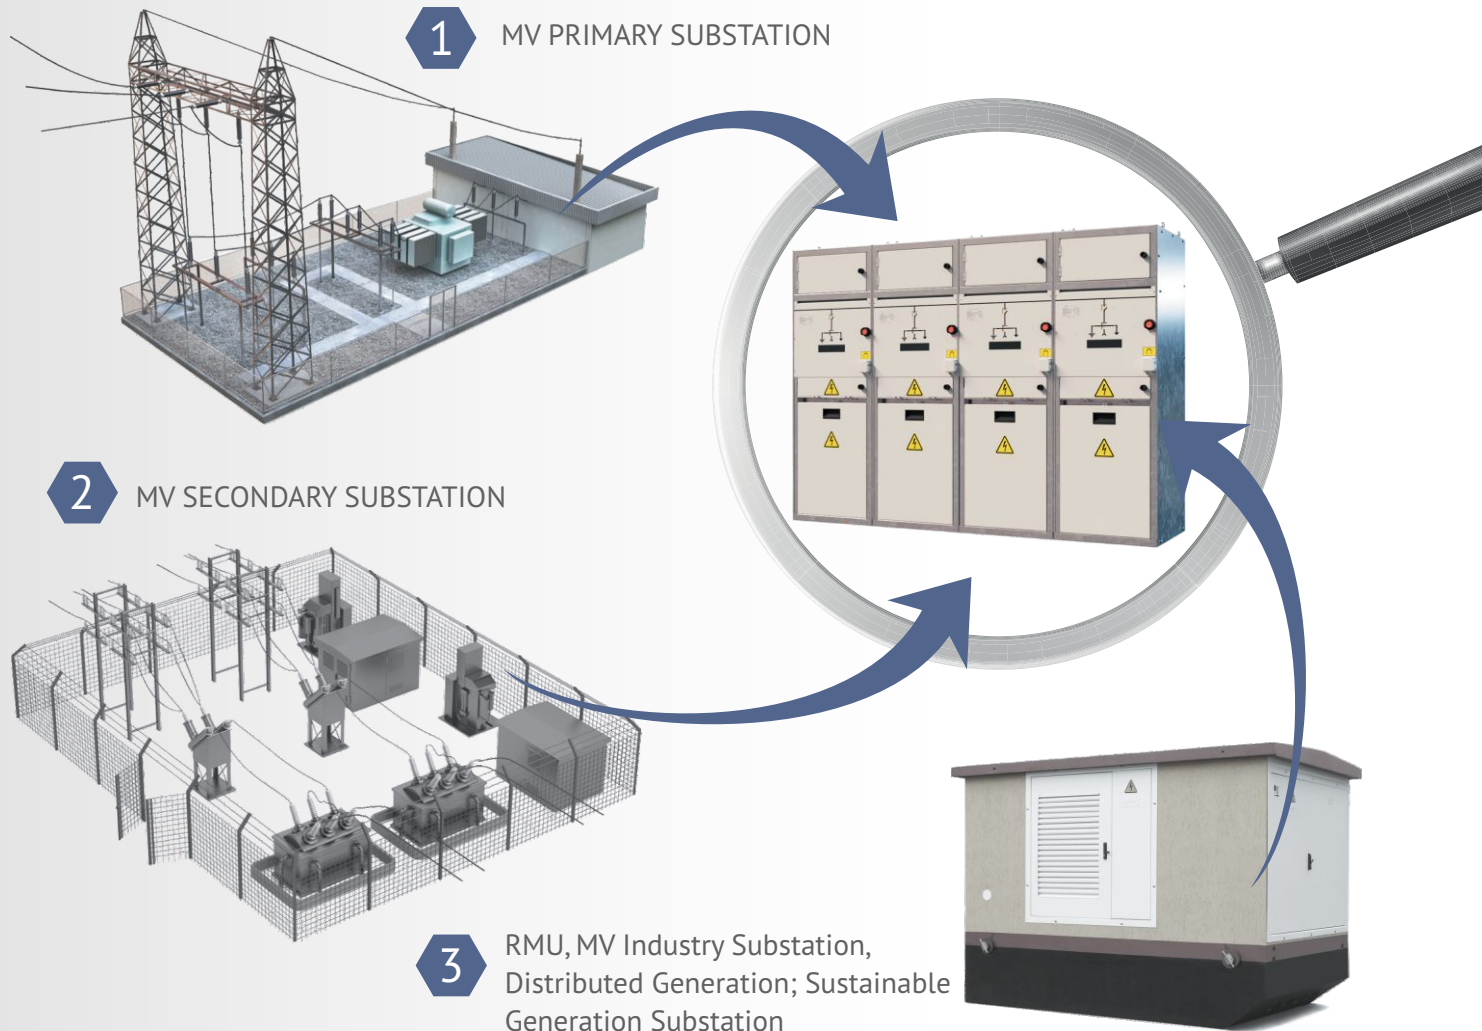

MV PRIMARY SUBSTATION							
<b>1</b>	VCB 	Isc rating Isc=25kA	Ir rating Ir=1250A	Protocol 	Protection IEC Curves 	Energy metering  kWh	IAC AFLR 
MV SECONDARY SUBSTATION							
<b>2</b>	VCB 	Isc rating Isc=16kA	Ir rating Ir=1250A	Protocol 	Protection IEC Curves 	Sensors 	IAC AFLR 
MV RMU, MV INDUSTRY SUBSTATION, DISTRIBUTED GENERATION; SUSTAINABLE GENERATION SUBSTATION							
<b>3</b>	VCB 	Isc rating Isc=16kA	Ir rating Ir=630A	RTU 	Signaling& Trip 	Sensors 	IAC AFLR 



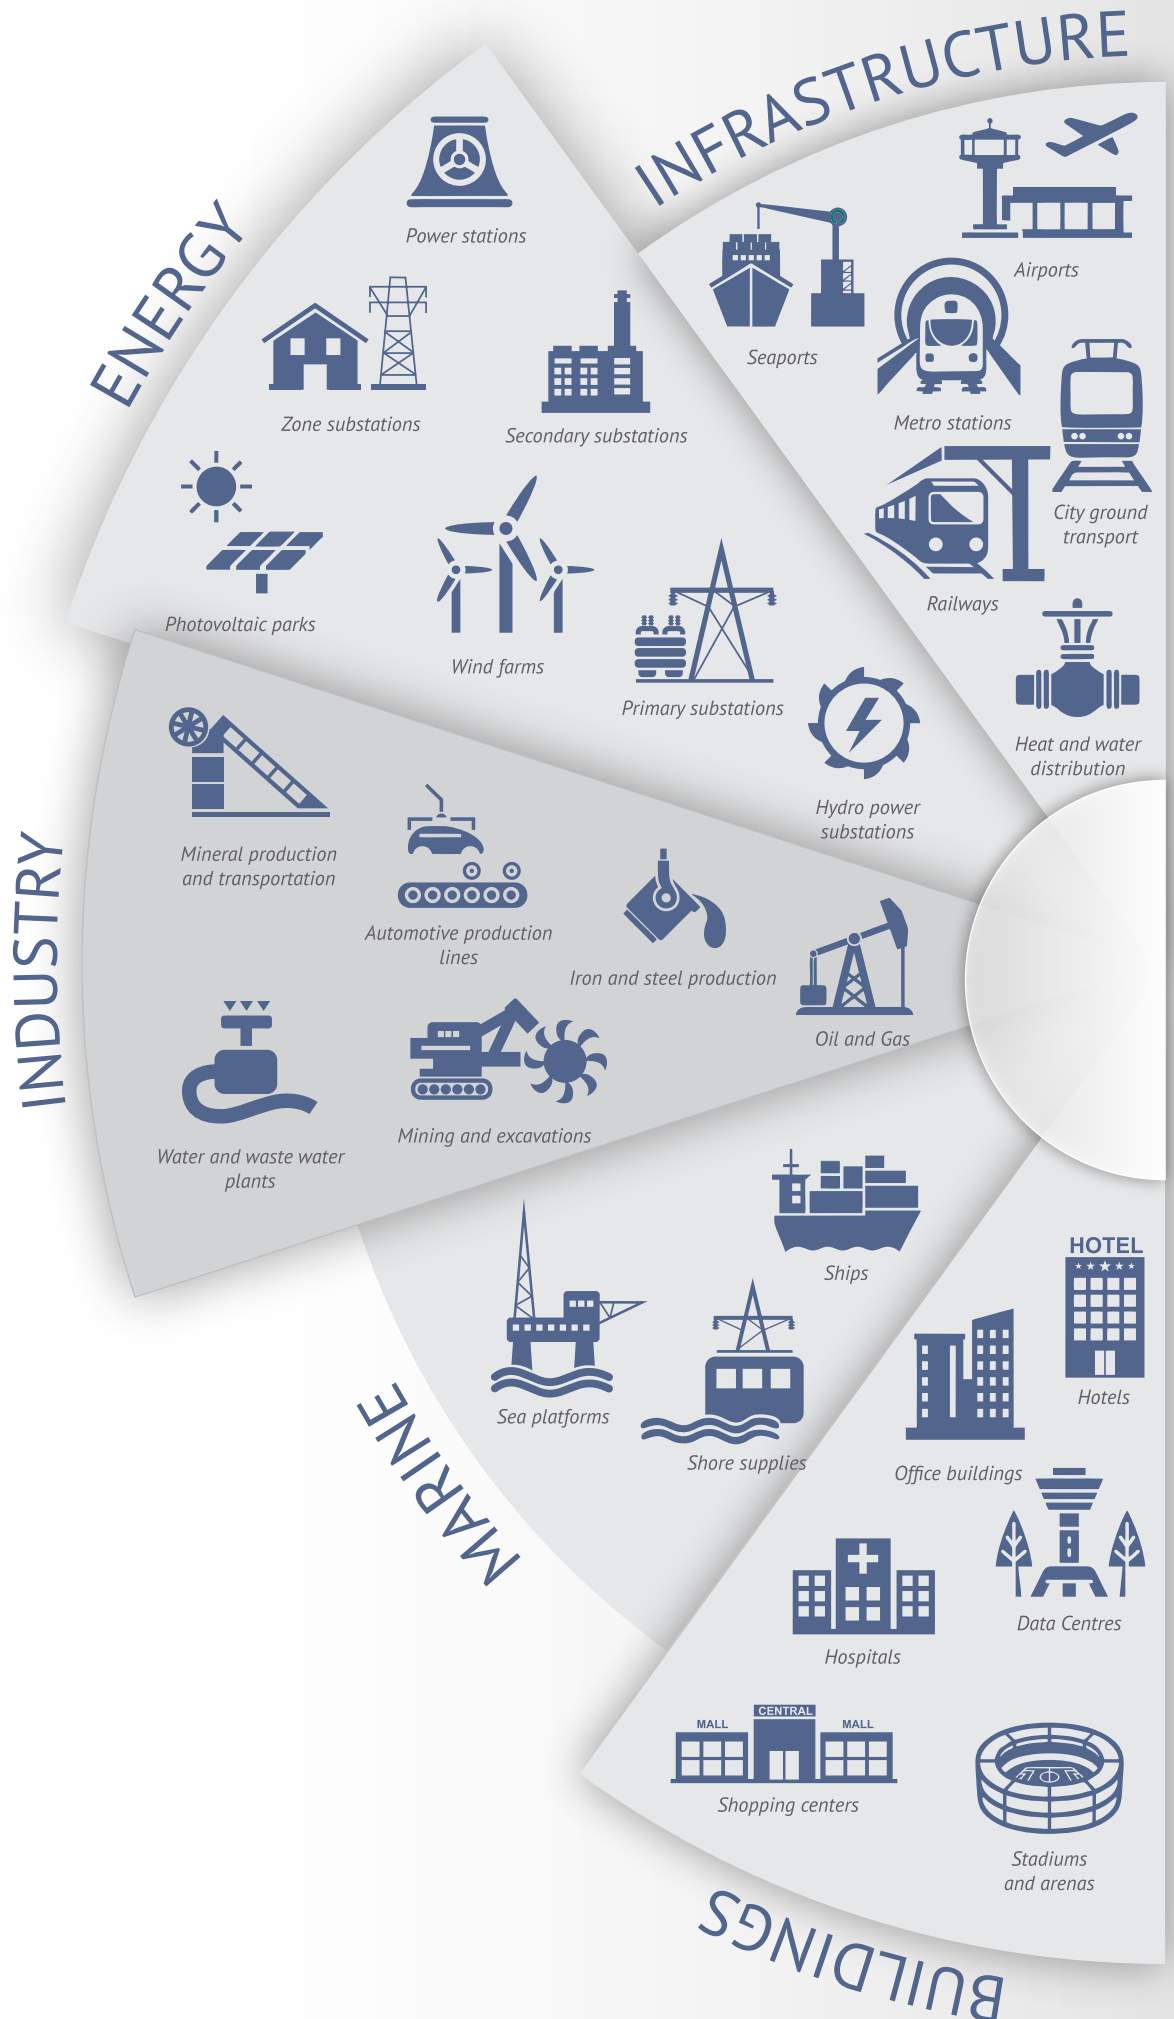

# ARC-PROOF DESIGN

## Compartments


- 1 Protection
- 2 Main busbar
- 3 Switching
- 4 Cable

## Attachments options

- 5 Arc duct
- 6 Extra cables

## Switching devices


- A Circuit breaker
- B Change over switch

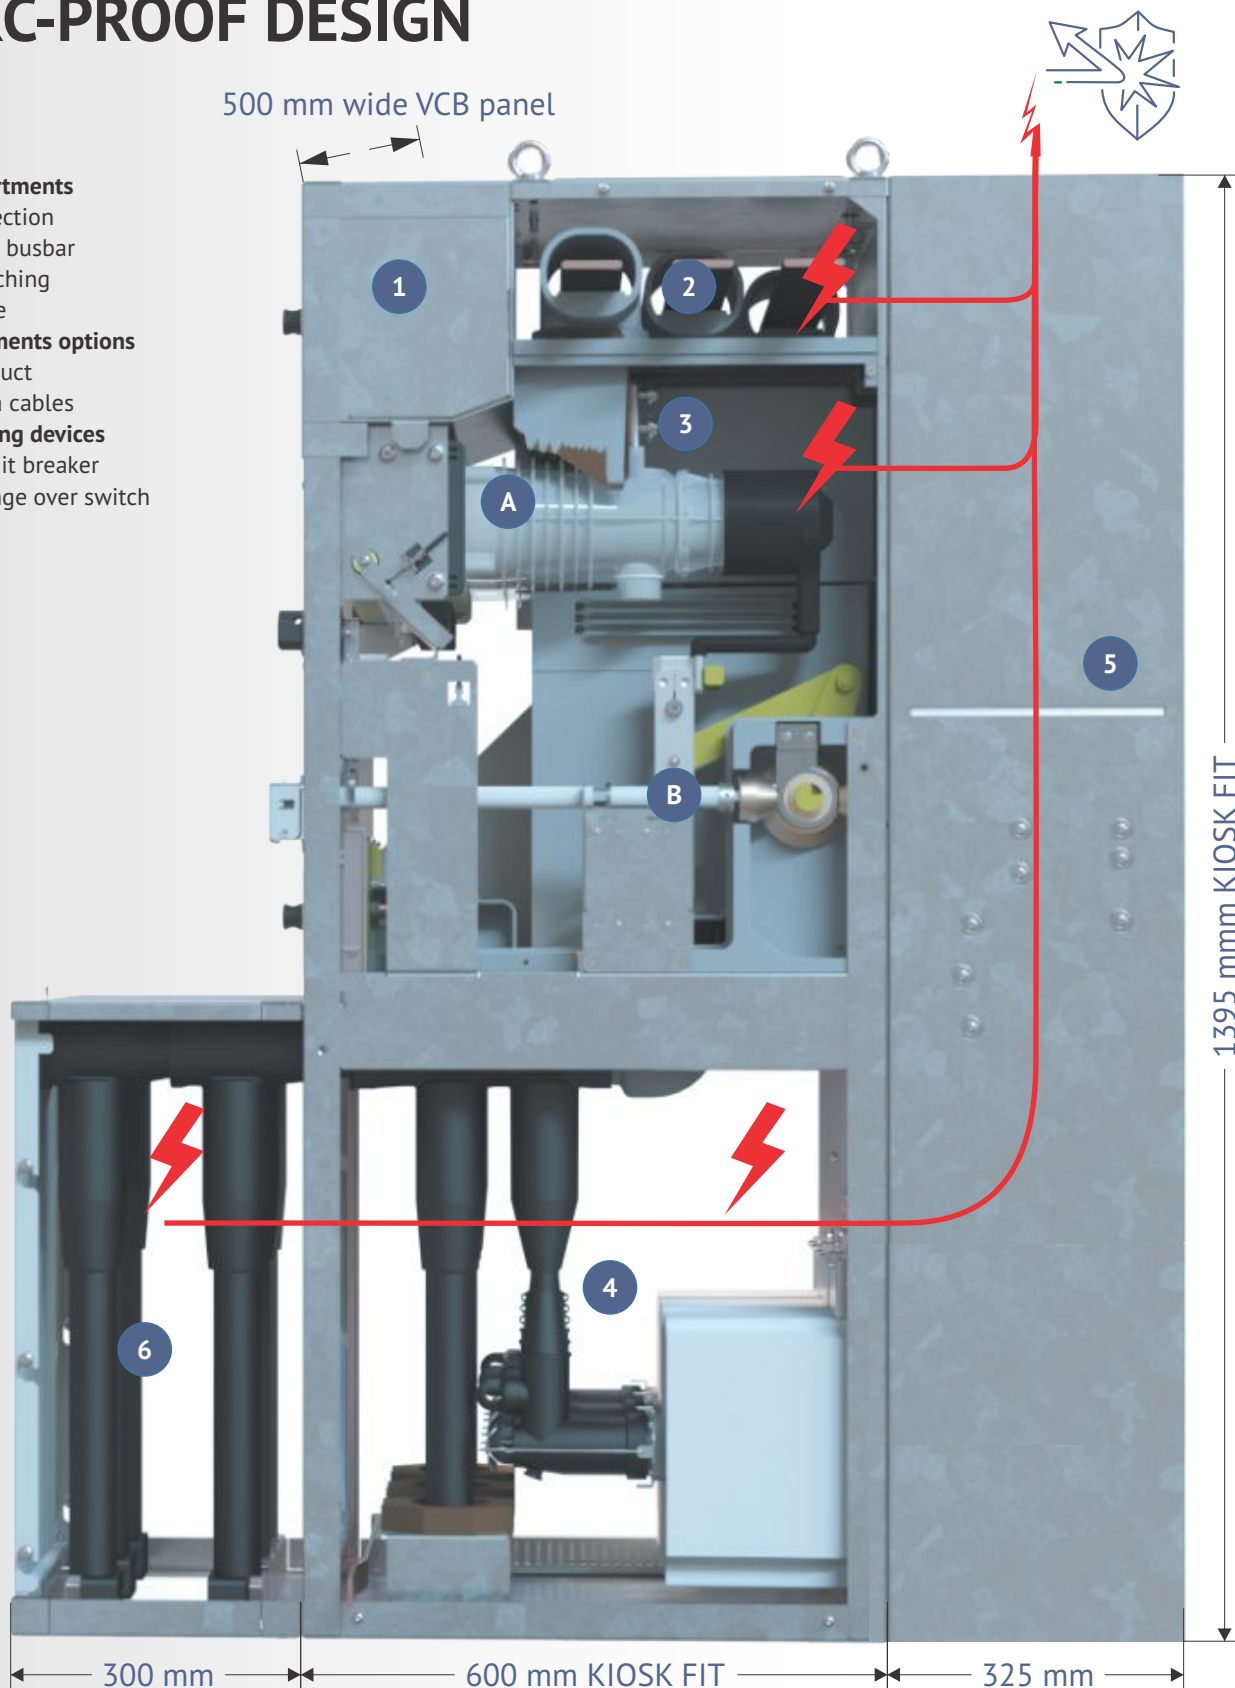


- SF6 free, environmental friendly
- No sealed reservoir with insulation medium subjected to periodical inspections
- Sandwich insulation (air and solid combination), PD free
- LSC2B-PI class as for heavy-duty withdrawable switchgear
- IAC: AFL and AFLR with optional arc duct



# INTUITIVE INTERFACES

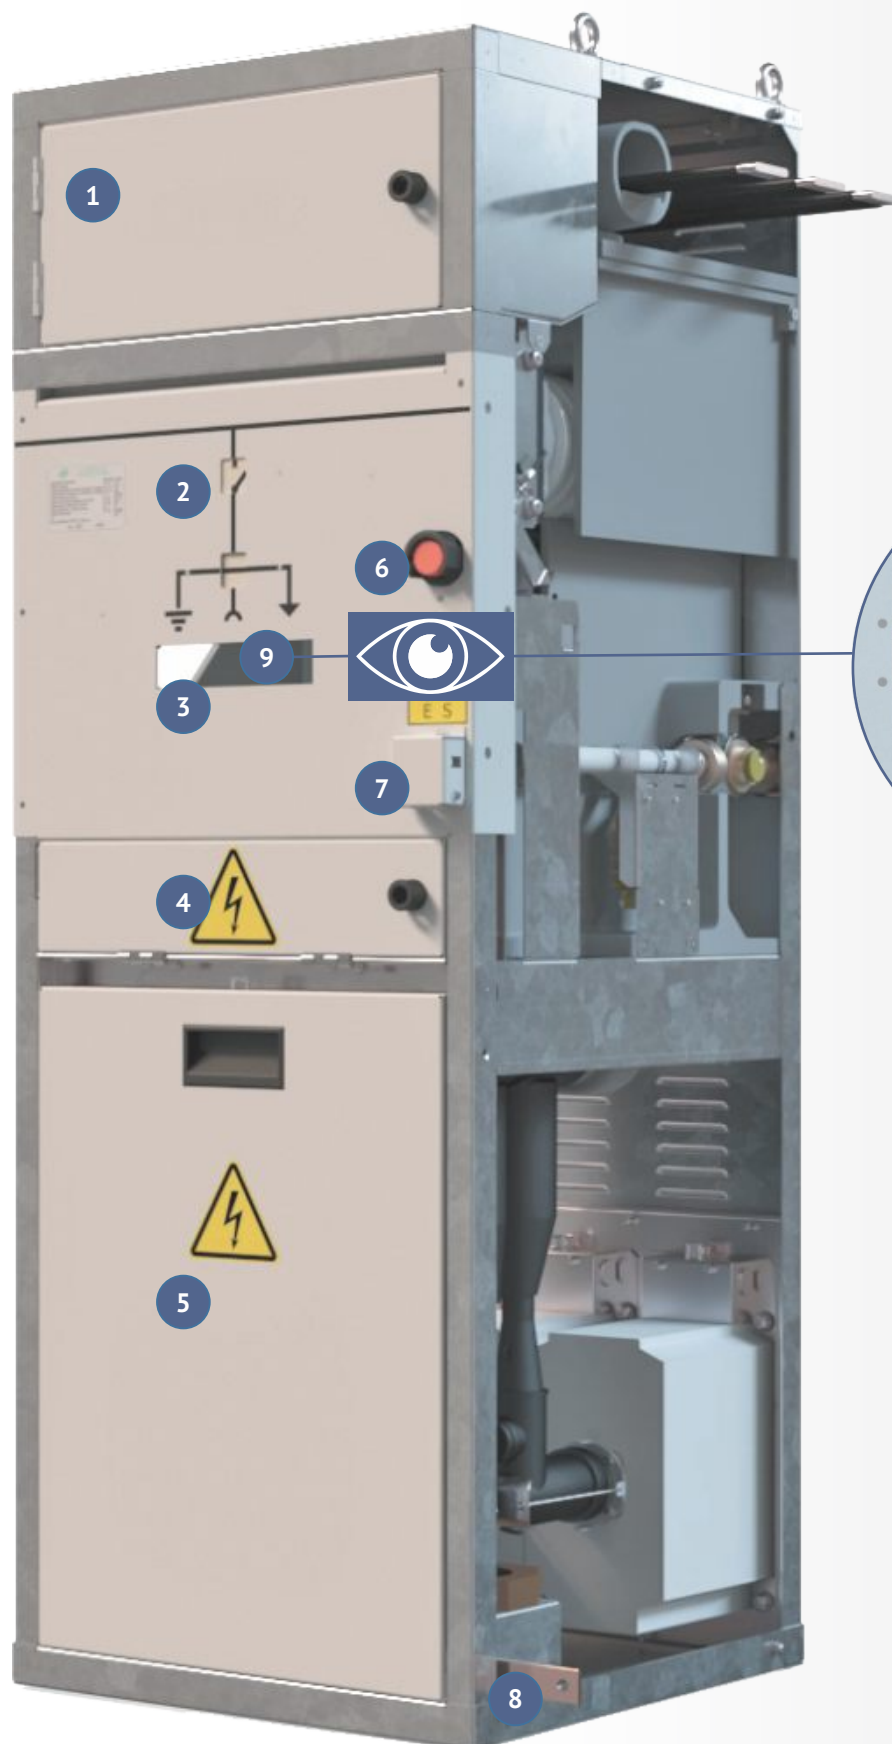


- 1 Standard or extended LV compartment
- 2 Dynamic mimic diagram
- 3 Inspection window
- 4 Cable test facility
- 5 Cable access door
- 6 VCB manual trip
- 7 COS operational slot
- 8 Earthing bar
- 9 Visual gap

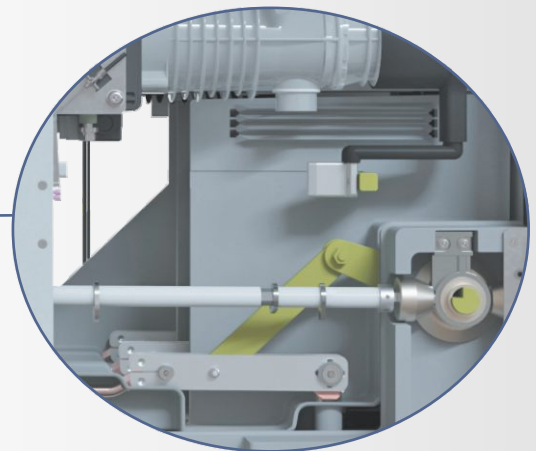


# CORE COMPONENTS

## Vacuum Circuit Breakers (VCB)

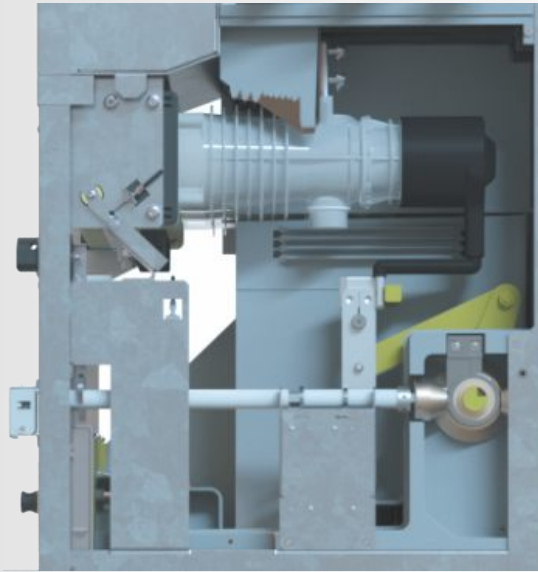

Standard duty ISM25\_LD


- 24 kV, 630 A, 20 kA
- M2 (30.000 CO), S2, E2, C2

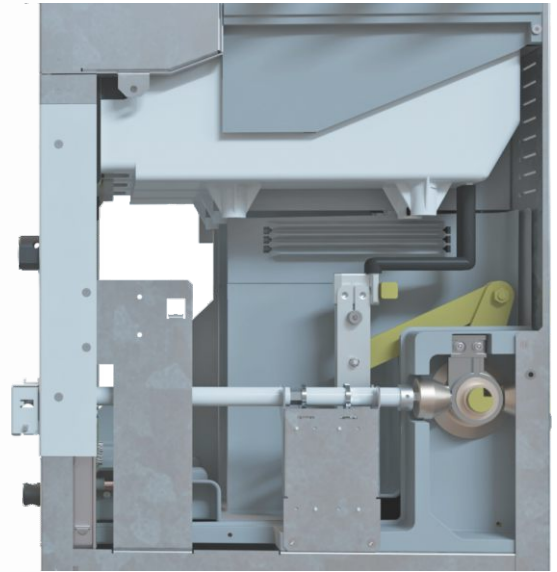

Heavy duty ISM25\_Shell


- 24 kV, 1250 A, 25 kA
- M2 (30.000 CO), S2, E2, C2

## Change Over Switch (COS)

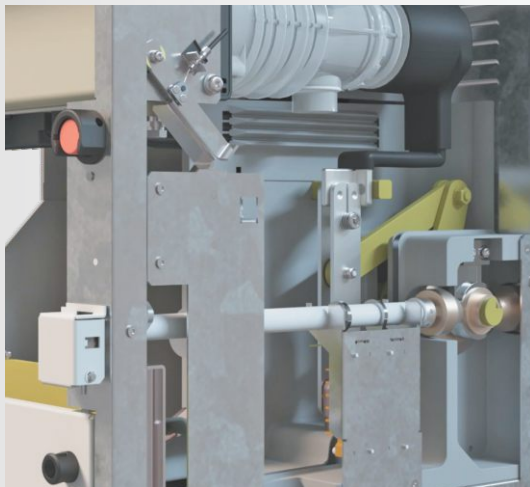

Change over switch COS25



- 24 kV, 25 kA / 3 s
- M1 (2.000 CO), E2

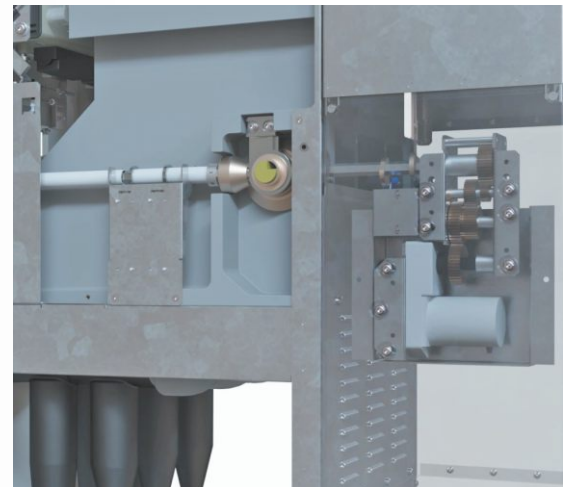

Motorized option for remote control

## Cable Testing Facility (CTF)

Innovative design with the integrated interface for safe cable testing.

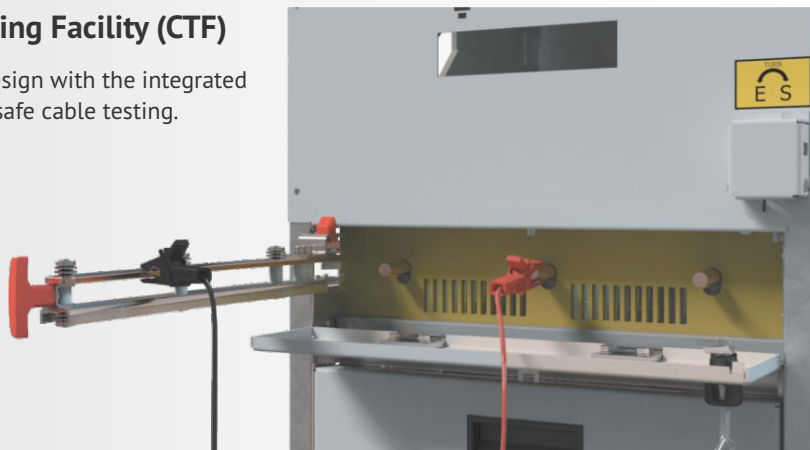



# FLEXIBLE ACCESSORIES

## Digital instruments




Phase current sensors



Phase and earth current sensors



Phase current sensors for T-connectors

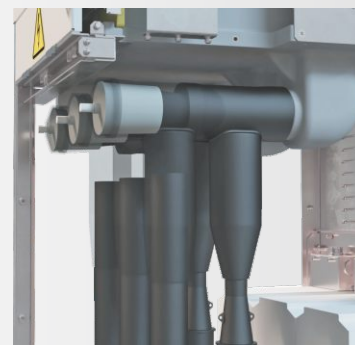


Voltage sensors for T-connectors


## Traditional instruments and condition monitoring accessories




Phase current and voltage



Partial discharge sensors



Temperature sensors



Surge arresters

## Intelligent Electronic Devices (IED)

Any digital protection relay can be used, depending on customer's traditions or preferences. However, in line with the modern trends of network digitalization, TE Energy offers its all new protection relay M-series designed to interface with digital current and voltage sensors. Current sensors of different types (detachable) and diameters (depending on cable size) are available. Voltage sensors compatible with most of well known brands of T-connectors.



# BENEFITS



## Reducing investment and ownership costs

- Instant digital network functionality allows all type applications in customer network or substation without necessity of later upgrades/investments
- Powerful ratings and reach functionality allows installation of the same product in all levels of distribution network
- Sandwich type insulation does not require periodical inspection for any pressure drops or leakages



## Maximum reliability and ease of use

- Unprecedented number of VCB switching operations (30,000 CO at Ir) makes SCELL lifetime the longest available on the market
- Use of field proven drives of VCB and COS, interlock mechanisms guarantee maximum reliability
- Operator friendly interface; dynamically changing mimic indication and availability of cable test facility make SCELL easy to use at installation and during later operation



## Minimizing outage time









- Events of short circuit, or any other abnormal conditions are instantly detected, reported and isolated, if required
- Remote operation and online network parameters monitoring allow quick restoration of a supply
- Short delivery terms; factory tuned functionality; simplicity of installation and commissioning minimize total project time
- Availability of a typical project and ready-made solutions simplify consultant's life, minimize design time and guarantee error free project



## Standards compliance

- Fully type tested as per latest IEC 62271-200; -100; -102
- Always safe, thanks to conformity of all switching devices to "an isolation device" as per IEC 61140
- Produced in EU with care and uncompromised factory testing under ISO9001 and IEC62271-200
- All materials used for production are environmentally friendly and controlled under ISO14001
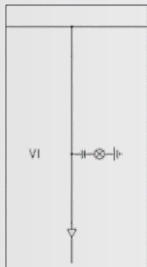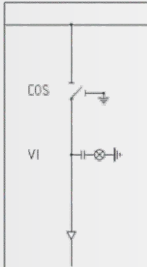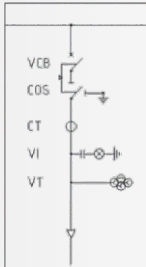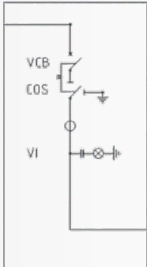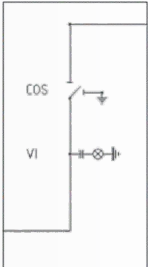
# PANEL SELECTION

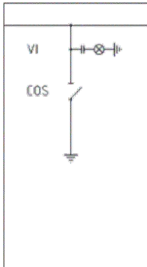LI	LS	LF; LFVT	CB (L or R)	CS (L or R)	M	ST	BE
Line input	Line switch	Line feeder	Coupler breaker	Coupler switch	Metering	Service transformer	Busbar Earthing
							

# TECHNICAL SPECIFICATIONS

## Main technical data:

Insulation type	Air
Rated voltage, kV	24
Rated power frequency withstand voltage, 1 min, kV	50/60*
Rated lightning impulse withstand voltage, kV	125/145*
Rated frequency, Hz	50/60
Rated current, A	630;800;1250
Rated breaking current, kA	20; 25
Rated short-time withstand current (3 s), kA	20; 25
Rated peak withstand current, kA	52; 65
Rated supply voltage for auxiliary circuits, V	24/48/110/220DC; 100-230AC
IAC classification (IEC62271-200)	AFLR 20kA/1s; 25kA/1s
Loss of service continuity and partition class	LSC2B-PI
Partial discharge level at 1.1 x U <sub>rated</sub> , pC	<20
Circuit breaker class	M2 (30.000CO), S2, E2, C2
Autoreclosing cycle	O-0,3s-CO-10s-CO
COS class as Disconnecter	M1
COS class as Earthing switch	M1, E2
Degree of protection	IP4X/IP41**

\* Across COS and VCB open contacts. Both of switching devices are capable of performing as an "isolation device" as per IEC 61140

\*\* IP41 on request

## Applicable standards:

High-voltage switchgear and control gear – Part 1: Common specifications	IEC 62271-1
High-voltage switchgear and control gear – Part 100: High-voltage alternating current circuit-breakers	IEC 62271-100
High-voltage switchgear and control gear – Part 200: High-voltage alternating current disconnectors and earthing switches	IEC 62271-102
High-voltage switchgear and controlgear – Part 200: AC metal-enclosed switchgear and controlgear for rated voltages above 1 kV and up to and including 52 kV	IEC 62271-200
Degrees of protection provided by enclosures (IP Code)	IEC 60529
Instrument transformers - Part 1: General requirements	IEC 61869-1
Instrument transformers - Part 2: Additional requirements for current transformers	IEC 61869-2
Instrument transformers - Part 3: Additional requirements for inductive voltage transformers	IEC 61869-3
Measuring relays and protection equipment	IEC 60255
Surge arresters - Part 4: Metal-oxide surge arresters without gaps for a.c. systems	IEC 60099-4
Voltage detecting systems (VDS)	IEC 61243-5
VPIS systems for rated voltages between 1kV and 52kV	IEC 62271-206
Protection against electric shock - Common aspects for installation and equipment	IEC 61140
EU LV directive; EMC directive	2014/35/EU; 2014/30/EU



# ON TIME WITH CONFIDENCE

In line with the growing focus on sustainability, we are fully committed to Life Cycle Assessment (LCA) and Environmental Product Declaration (EPD). LCA is a method used to evaluate the environmental impact of a product throughout its entire life cycle, from raw material extraction to disposal. Building on this, an EPD is a detailed report that communicates the environmental performance of a product based on recognized standards. Together, these practices help us minimize our carbon footprint and reinforce our commitment to reducing environmental impact as part of our ongoing sustainability efforts.



**TE<sup>2</sup>Energy**  
On time with Confidence

14, Visase str.,  
Tallinn 11415 Estonia

Tel.: +372 606 47 57

E-mail: [info@te.energy](mailto:info@te.energy)

Web: [te.energy](http://te.energy)



rev. 3. 04.4.2025

This document is copyright and is intended for users and distributors of TE Energy products. It contains information that is the intellectual property of TE Energy and this document or any part thereof, should not be copied or reproduced in any form without the prior permission of TE Energy. TE Energy applies a policy of ongoing development and reserves the right to change products without notice. TE Energy does not accept any responsibility for loss or damage incurred as a result of acting or refraining from action based on information in this document.